




STANDARD KIT STARLINK


What's In The Box

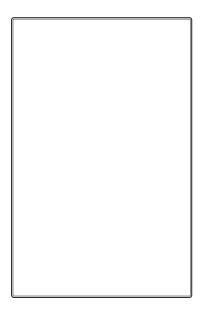






Standard




Kickstand



Gen 3 Router

AC Power Cable 1.5 m (4.92 ft)



Power Supply

1.5 m
(4.92 ft)


Package Weight: 6.73 kg (14.83 lbs)

Starlink Cable

15 m (49.2 ft)


Package Dimensions: 652.4 x 451.7 x 97.9 mm (25.69 x 17.78 x 3.84 in)

STANDARD STARLINK

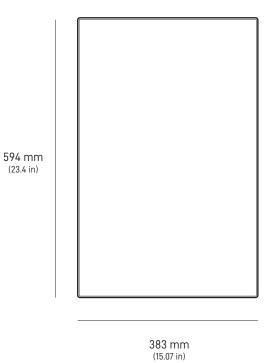



(1.5 in)

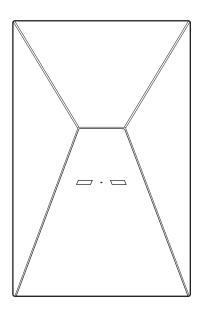

Antenna Electronic Phased Array

Field of View 110°

Orientation Software Assisted Manual Orienting

Weight 2.9 kg (6.4 lb)

3.2 kg (7 lb) with Kickstand

3.8 kg (8.3 lb) with Kickstand & 15 m Cable


Environmental Rating IP67 Type 4

Operating Temperature -30°C to 50°C (-22°F to 122°F)


Wind Speed Operational: 96 kph+ (60 mph+)


Snow Melt Capability Up to 40 mm / hour (1.5 in / hour)

Power Consumption Average: 75 - 100 W

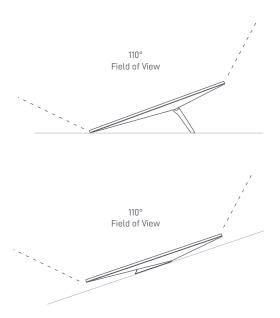


KICKSTAND

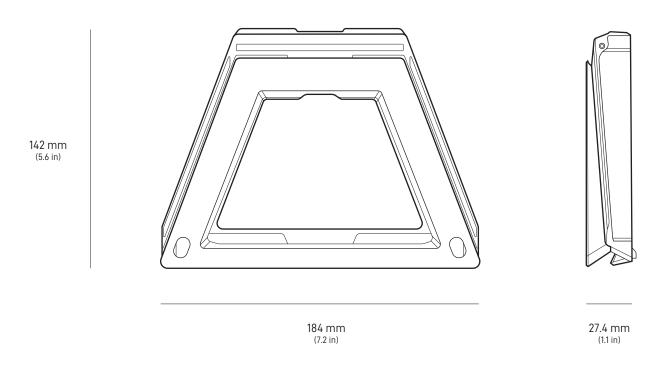

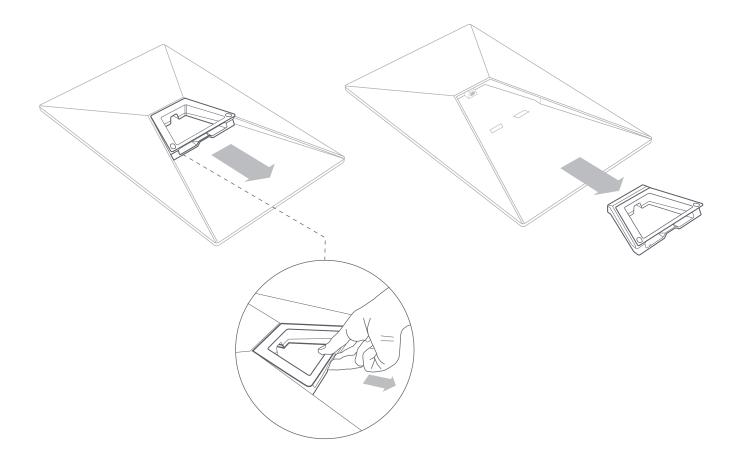


ROUTER STARLINK

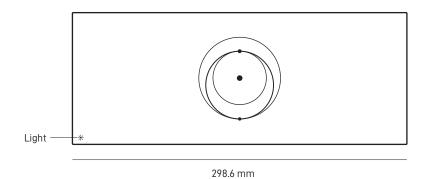



120.8 mm (4.75 in)

43.4 mm (1.70 in)

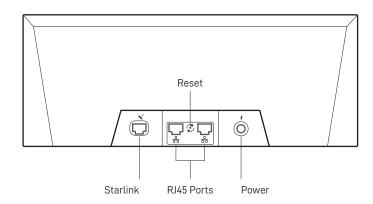

Product Dimensions 43.4 x 298.6 x 120.4 mm (1.7 in x 11.76 in x 4.74 in)

Wi-Fi Technology 802.11 a/b/g/n/ac/ax

Generation WiFi 6

Radio Tri Band 4 x 4 MU-MIMO

Ethernet Ports Two (2) Latching Ethernet LAN ports with removable cover

Coverage Up to 297 m² (3,200 ft²)

Operating Temperature -30°C to 50°C (-22°F to 122°F)

Weight 0.57 kg (1.25 lbs)

Security WPA2

Environmental Rating IP56 Rated (Water Resistant), configured for indoor use


Power Indicator LED | face plate, lower left corner of router

Mesh Compatibility Compatible with Starlink Gen 2 and Gen 3 Mesh Nodes, up to 3 Starlink Mesh Nodes

*Not compatible with 3rd party mesh systems

Devices Connect up to 235 devices

POWER SUPPLY STARLINK

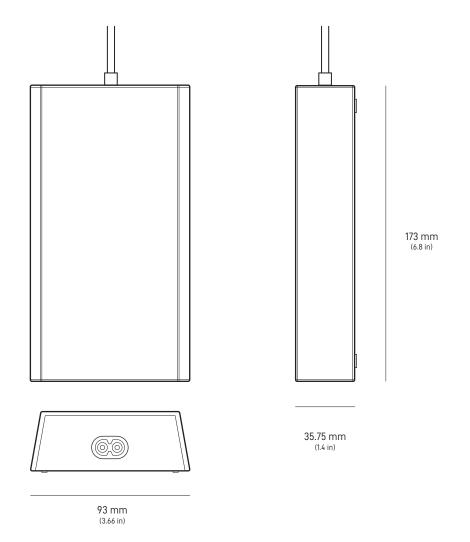


Product Dimensions 173 x 93 x 35.75 mm (6.8 in x 3.66 in x 1.4 in)

Weight 0.65 kg (1.43 lbs)


Environmental Rating IP66 Type 4


Operating Temperature -30°C to 60°C (-22 to 140°F)

Power Specifications $100-240 \text{V} \sim 2.5 \text{A} 50 - 60 \text{ Hz}$

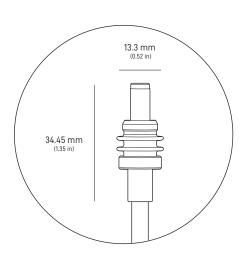


STARLINK CABLE STARLINK

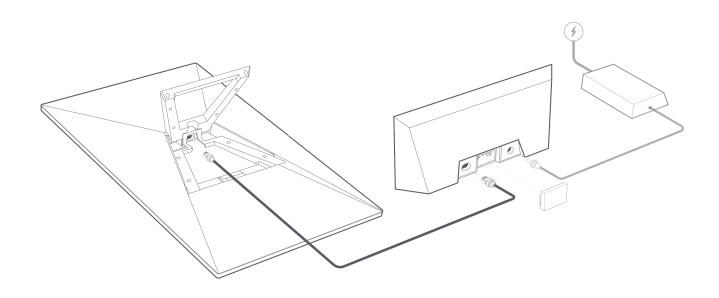

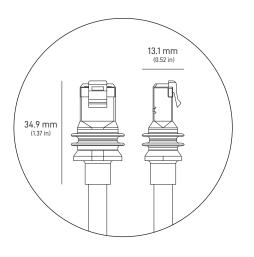

Pin 1
Shield
8
7
6
5
4
3
2
1

Wire Color	Pin 2
Drain - Bare Wire	Shield
Brown	8
White / Brown	7
Green	6
White / Blue	5
Blue	4
White / Green	3
Orange	2
White / Orange	1

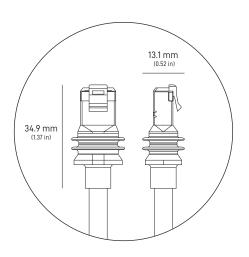

POWER SUPPLY CABLE STARLINK

